




S464 DVB-S2 PCI Specification

- Win8 support
- Low power consumption DVB-S2 chipsets
- Low profile PCI interface
- Bundled software myTeVii
- Trial version of ProgDVB Pro
- Bundled IP software TeViiData

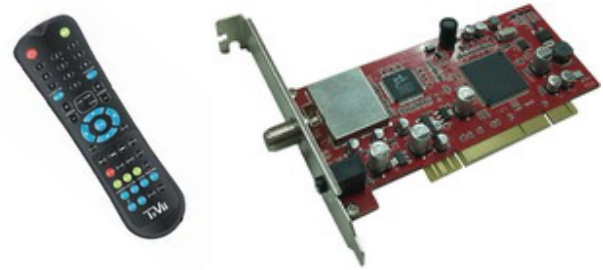

Software Key Features

- Watch DVB-S2/DVB-S TV and listen digital radio on PC
- Support HDTV (MPEG-4 AVC/ H.264 up to 1080i)
- Linux driver available
- Real-time recording in MPEG/TS format
- Pre-scheduled & wake-up recording
- DiSEqC 1.0/1.1/1.2 & USALS supported
- Blind Scan
- Time-shifting
- Electronic Program Guide (EPG)
- Subtitles
- Plug-in Interface supported
- Favorite list
- On Screen Display (OSD)
- Remote control supported
- Support English/Russian/German/French & other languages



S464 DVB-S2 PCI Specification

Specification

- Input terminal: F-type 75 Ohm
- Receiving frequency: 950~2150 MHz tuning range

LNB & Switch control

- LNB supply voltage: 13V/18V
- DiSEqC: 1.0/1.1/1.2
- Symbol rate: 2~45Msps
- Antenna & LNB control: 22KHz

Interface

- PCI Bus: PCI 2.2 compliant
- Host Bus burst rate: 132 MB/S
- Host Bus width: 32 bit

Package Includes

- S464 DVB-S2 PCI card
- Remote control & infrared sensor cable
- Installation CD
- Quick Installation Guide (English & German)

System Requirements

- Microsoft Windows XP/ Vista / 7 / 8
- 2.0GHz CPU (2.4GHz for HDTV)
- 256M RAM (1GB for HDTV)
- VGA card with at least 128MB memory
- Microsoft Direct X 9.0C or above



S464 DVB-S2 PCI Specification

- Sound card or on-board sound chip
- One free PCI slot
- Digital satellite dish & LNB